




## I. Overview

SX-06L is a high quality USB hand phone with 4-polyphonic ring tones and LCD display of Date and Skype Contacts. Its fashionable appearance, easy-to-use design and euphonious melody will set you apart from others. Just plug it into your PC or laptop, and then you can enjoy the full features of Skype™.

## II. The Phone Layout

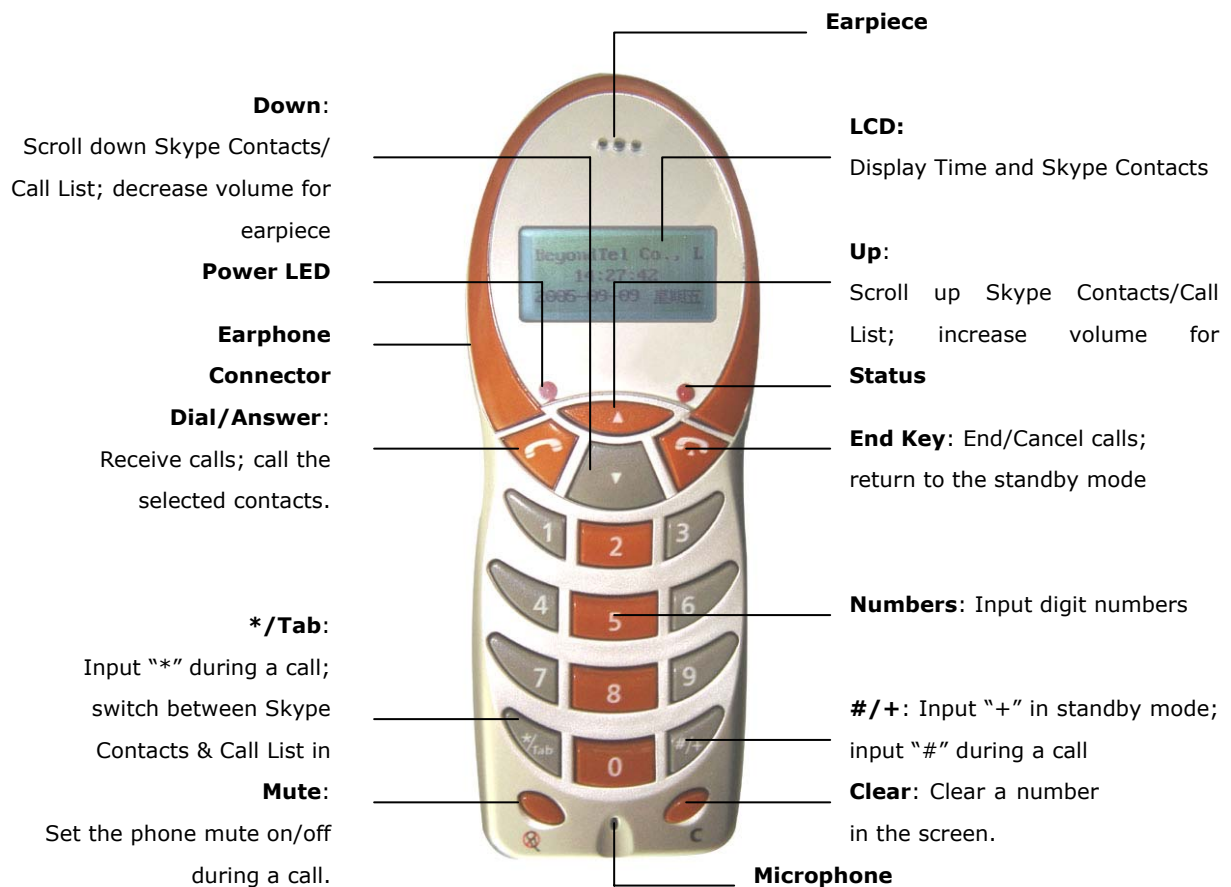

## III. Host System Requirements

- ✓ Microsoft Windows 2000/XP
- ✓ Pentium 400MHz above processor/128MB RAM/16MB free hard disk capacity.
- ✓ One USB port available.
- ✓ Internet connection (ADSL, Cable Modem, Dial-Up, Wireless LAN)



#### IV. Key Features

Here below are the key features of the USB Phone SX-06L:

- ✓ 12 classical 4-polyphonic ring tones catering to different tastes.
- ✓ LCD display of Skype contacts and time.
- ✓ LCD display of any kind of language.
- ✓ "Up and Down" key to scroll up/Down Skype contacts that are displayed in the LCD screen of the phone.
- ✓ Rings loudly on an incoming call.
- ✓ Fully functional keypad and LCD display of Skype contacts enables you to make/receive calls solely relying on your USB phone.
- ✓ Red Power LED and green Status LED.
- ✓ Acoustically isolated earpiece and microphone to eliminate echo.
- ✓ Full-duplex communication with crystal clear sound.
- ✓ USB interface PnP. No external power/sound card needed.
- ✓ Seamless integration with Skype™ and QQ.
- ✓ Supplied hands-free earphone.
- ✓ Mic mute button for privacy protection.
- ✓ Handy, chic, and portable for notebook PC.
- ✓ Adjustable volume for earpiece and ringer.
- ✓ Also compatible with many other PC-based softphone applications, such as **MSN, Yahoo Message, Xten, Dialpad, MediaRing, Net2phone**, etc.

#### V. Specifications

<b>Weight</b>	90g
<b>Dimension</b>	48*120*24mm
<b>USB Port</b>	Mini USB A-type
<b>Earphone Connector</b>	2.5mm
<b>Standard Support</b>	Compliant with USB V 1.1 Compliant with USB Audio Device Class Spec V 1.0 Compliant with USB HID Version 1.1
<b>LED</b>	Power LED   Red
	Status LED   Green
<b>LCD</b>	Display Time and Skype Contacts
<b>Voltage</b>	4~5.25 V
<b>Operating Humidity</b>	5~95%RH
<b>Operating Temperature</b>	0~40°C